



Control Programming LLC

Release Notes

Lighting – Pharos - Cloud

version 2.00.006

Extension

This release note is for the Pharos Crestron Home extension. This extension provides both sequence/quick action control as well as limited UI control of the Pharos DMX lighting system. The Pharos DMX product page can be found at <https://www.pharoscontrols.com/designer/hardware/lpc/>.

This extension is not intended to replace the Pharos desktop app for configuration purposes.

Notes and Recommendations

Drivers->Lights->Pharos->Luxor

System Requirements and Dependencies

Crestron Home v3.005.0054

Operation Installation/Upgrade Instructions

Installer Options



Obtain License Key

Clicking the link, on the right, takes you to CPLLC.net where license keys can be obtained. A purchased license key is required to be entered i... CPLLC.net

Obtain License Key – clicking the CPLLC.net link will take you to the webpage to purchase a license key.



Enter License Key

A purchased license key must be obtained by clicking the above link and entered here. The extension will function 100% without a license key ...

License Key – this extension requires a paid license key which can be obtained by clicking the above. For testing purposes, this extension will function 100% for 2 hours.

Rebooting will reset the two hours.



CPLLC License Manager

This extension requires the CPLLC License Manager to also be installed...

IP Address – IP address of the FX Luminaire controller



Show in Home Screen

Checked to show on Home screen

Show on Home Screen – Checked if you want the extension to display on the home screen.



Show on Room Screen

Checked to show in Room screen

Show on Room Screen – Checked if you want the extension displayed on the room page.




IP Address

Local IP Address of the Pharos control box.

IP Address – address of Pharos controller

Actions

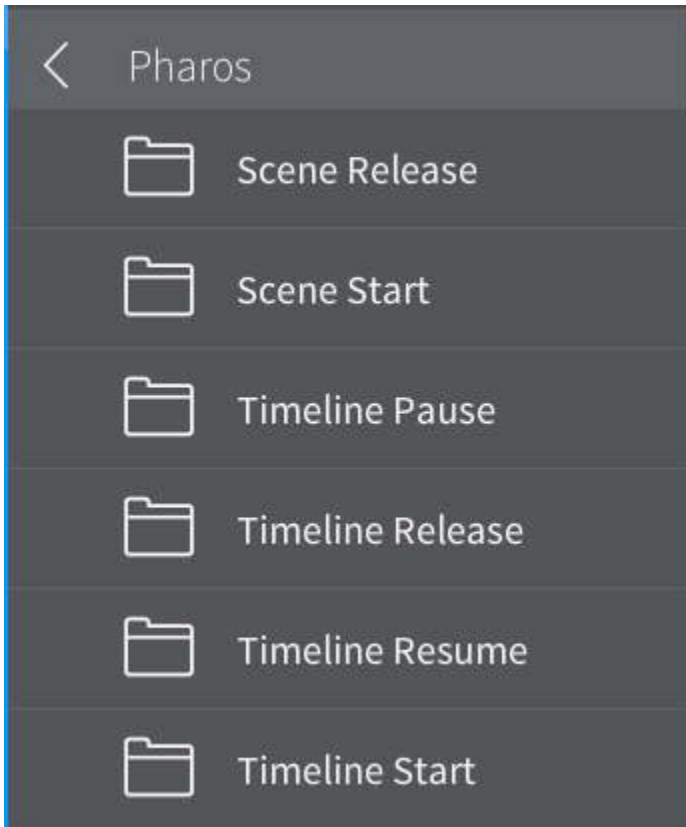

Scene Release – Release the selected scene. A list of scene names will be displayed for selection. Only a single scene can be selected.

Scene Start – Start the selected scene. A list of scene names will be displayed for selection. Only a single scene can be selected.


Timeline Pause – Pause the selected timeline. A list of timeline names will be displayed for selection. Only a single timeline can be selected.

Timeline Release – Release the selected timeline. A list of timeline names will be displayed for selection. Only a single timeline can be selected.


Timeline Resume – Resume the selected timeline. A list of timeline names will be displayed for selection. Only a single timeline can be selected.

Timeline Start – Start the selected timeline. A list of timeline names will be displayed for selection. Only a single timeline can be selected.

End-User Experience

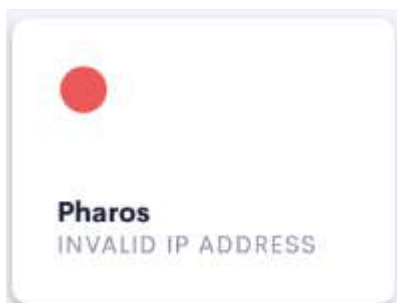


The left image shows feedback if an invalid IP address is entered into the extension. The right image shows the feedback when the license has expired.

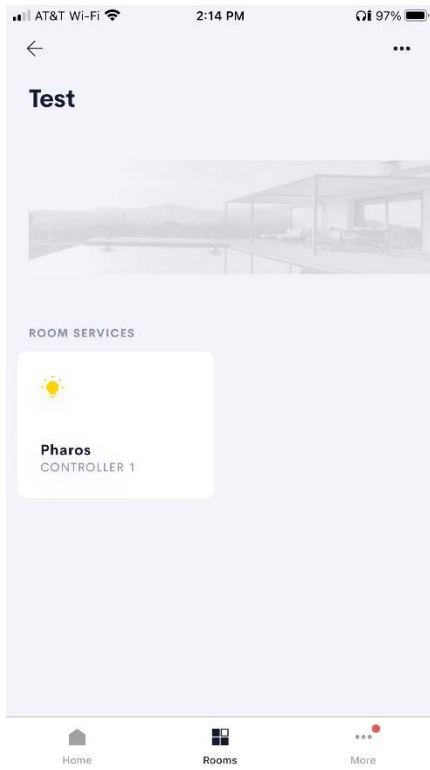

This image shows the Pharos room tile.

If the installer option, check to make Visible is checked there will be tile displayed on the home screen.

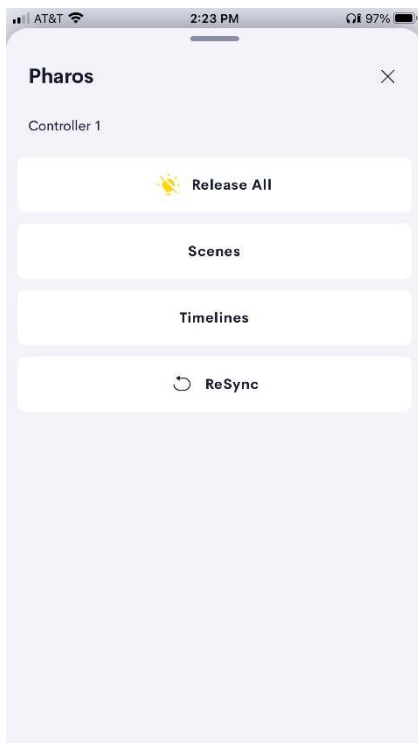

Upon touching the room/home tile, this screen will be displayed.


Release All – turns off all triggers/timelines/scenes.

Scenes – Used to select which scene to control

Timelines – Used to select which timeline to control

ReSync – retrieves the latest list of scenes/timelines/triggers from the Pharos controller.


SCENES

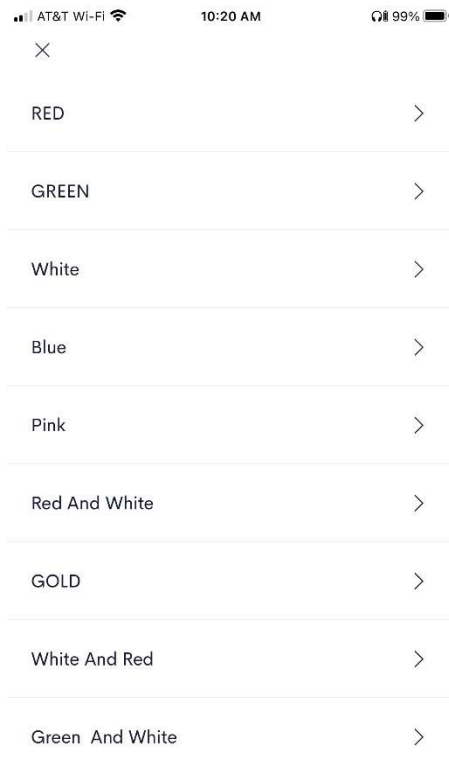

When the main control page's, Scene button is touched, a list of scenes to select from is displayed as shown to the left.

Simply touch any scene name and the following control screen will be displayed.

The group names are retrieved from the FX Luminaire controller and configured using the mobile app.

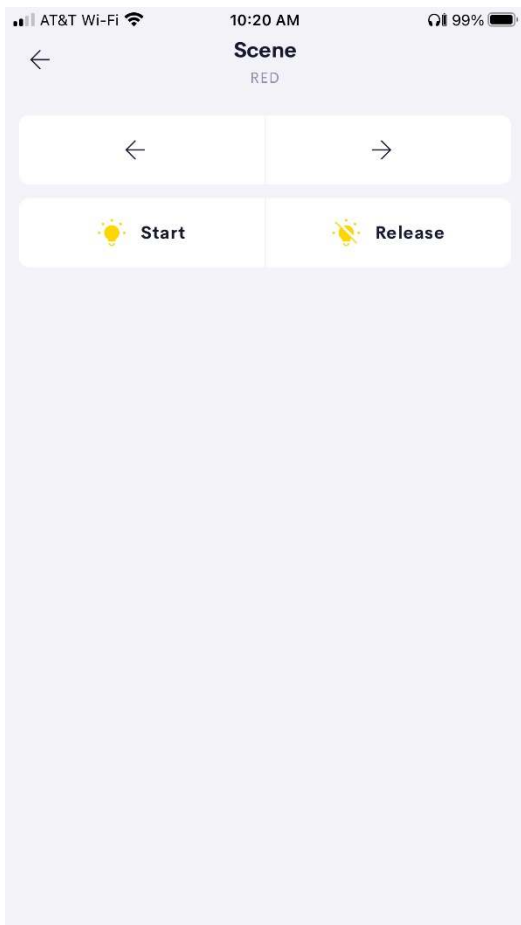


Left Arrow – displays the previous scene.

Right Arrow – displays the next scene.

Start – start the scene running.

Release – releases the scene (stops).


TIMELINES

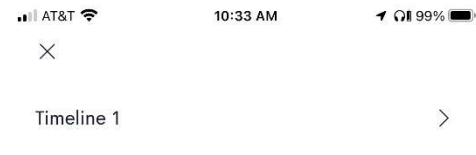

When the main control page's, Timelines button is touched, a list of timelines to select from is displayed as shown to the left.

Simply touch any timeline name and the following control screen will be displayed.

The theme names are retrieved from the Pharos controller and are configured using the mobile app.

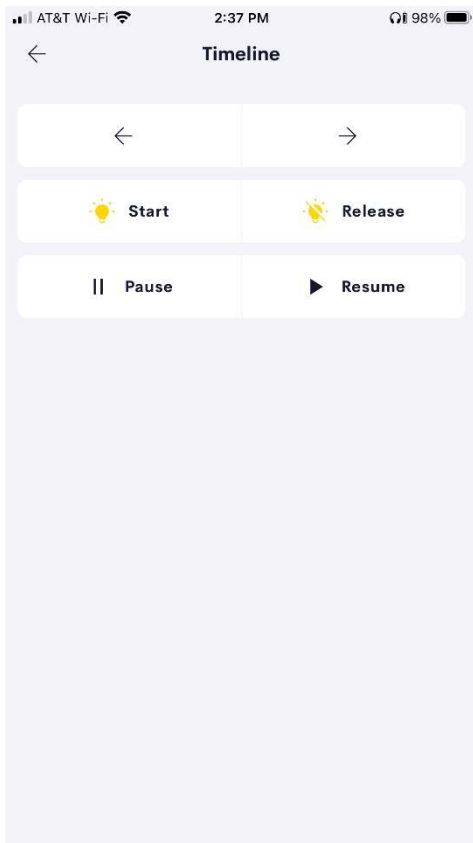

Left Arrow – displays the previous timeline.

Right Arrow – displays the next timeline.

Start – start timeline.

Release – release timeline.

Pause – pause timeline

Resume – resume paused timeline

Limitations/Known Issues

- No known limitations or issues

Supported Features

- Not applicable

Test Environment

- CP4-R and MC4-R
- Crestron Home v3.005.0054

Contact Information

- Company: Control Programming LLC
- Author: Randy Johnson
- Email: randy@CPLLC.net
- Website: <https://cpllc.net>
- License Key: <https://cpllc.net/product/pharos-lpc/>

Version History

- | | |
|------------|--|
| 2023-04-04 | 2.00.006 |
| | <ul style="list-style-type: none">• Added required CCD SDK JSON fields |
| 2022-11-04 | 2.00.003 |
| | <ul style="list-style-type: none">• Initial release |

Licensing and Copyright Information

© 2022-2023 by Control Programming LLC all rights reserved.